

**Speed Queen®**

**MULTI-HOUSING**

Quantum® Rear Control  
Commercial Washers & Dryers

COIN  
CARD VEND



# BUILT FOR **RELIABLE** PERFORMANCE.

Speed Queen's commitment to multi-housing laundry is unmatched anywhere else in the industry. Built for performance and reliability, our laundry machines maximize your profitability and provide unparalleled convenience for your property.

Speed Queen's line of washers and dryers are ready to meet the demands of your laundry room. They are designed to work as a single or stacked laundry setup, provide maximum energy efficiency and long-lasting performance.

EQUIPPED WITH QUANTUM CONTROLS TO PROVIDE:

Total automated management of your laundry room. Its simple, powerful programming gives you the ability to:

- Easily manage your laundry operation with remote internet access.
- Establish multi-level vend prices, soil level cycles and dryer top-off times on your machines.
- Track coin or card transactions.
- WashAlert™ with Service Alert capable.

## **ACTIVATION** TYPES

Offering a variety of activation types allowing you to tailor your laundry room to fit your needs. Standard and high capacity meter case available.



Coin ("C")



Prep for Card ("Y")



Prep for Coin ("X")



## **TOP LOAD** WASHER

Speed Queen top load washers offer customer conveniences and quality components.



### FEATURES

#### HIGH SPEED EXTRACT

710 RPM final spin to maximize moisture removal from clothes.

#### AUTOMATIC BALANCING SUSPENSION SYSTEM

Rear self-leveling legs maximize smooth and quiet operation on all floor types.

#### DURABLE STAINLESS STEEL WASH TUB

Comes with a lifetime warranty, and actually becomes smoother with each use, so it won't pill, snag or fray clothes.



# FRONT LOAD WASHER

The Speed Queen front load washer gives building owners and property managers unparalleled ability to reduce water and energy costs through advanced programmability.


## FEATURES

### REVOLUTIONARY BALANCING TECHNOLOGY

Improved out-of-balance technology that uses a redesigned suspension and advanced sensing to manage and redistribute out-of-balanced loads, delivering uninterrupted cycles.

### STAINLESS STEEL WASH TUB

Comes with a lifetime warranty, and actually becomes smoother with each use, so it won't pill, snag or fray clothes.

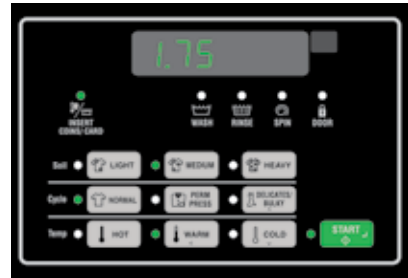

### LOW WATER USAGE

Per cycle to reduce operating costs.

### HIGH SPEED EXTRACT

1200 RPM final spin exerts 440 G-Force to maximize moisture removal from clothes.

### LARGER DOOR OPENING

Extra wide 15.5" (394 cm) for easy loading and unloading of clothes.

### FOUR COMPARTMENT SUPPLY DISPENSER

Prewash, wash, fabric softener, bleach.



ENERGY STAR®  
Certified Washer

# SINGLE LOAD DRYER

Speed Queen rear control commercial dryers offer customer conveniences and quality components. Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road.



## FEATURES

### SUPERIOR DRYING CONVENIENCE

With a 2.06 sq. ft. (1914 cm<sup>2</sup>) door opening, making it the widest in the industry, Speed Queen dryers offer the convenience of easy loading and unloading.

### EFFICIENT DRYER HEATING

25,000 BTU (gas models) and 5,350 Watts (electric models) provide fast drying and lower operating costs. Speed Queen dryers offer some of the fastest drying times in the industry. The perfect balance of heat, airflow and tumble action for optimal performance and efficiency.

### UPFRONT LINT FILTER

Easy to clean and secured.

### REVERSIBLE DOOR (SOLID DOORS ONLY)

For installation flexibility.



# STACK DRYER

The Speed Queen stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. Available with see-through or solid door models. ADA Compliant (bottom dryer only).



MODELS and ACTIVATION  {NOTE: Coin Box Sold Separately}	Top Load Washer		Front Load Washer		Single Load Dryer		Stack Dryer	
	COIN	SWNNC2PP113TW01 SWNNC2SP113TW01 SWNNC2PP113TW02♦ SWNNC2SP113TW02♦	COIN	SFNNCRSP113TW01 SFNNCRSP113TW02♦	Electric 208: 240: Gas: Electric 240: Gas:	SDENCRGS153TW01 SDENCRGS173TW01 SDGNCRGS113TW01 SDENCRGS173TW02♦ SDGNCRGS113TW02♦	Electric 208: 240: Gas: Electric 208: 240: Gas:	SSENCAGS153TW01 SSENCAGS173TW01 SSGNCRGS113TW01 SSENCAGW153TW01 SSENCAGW173TW01 SSGNCRGS113TW01
	PREP CARD	SWNNY2PP113TW01 SWNNY2SP113TW01	PREP CARD	SFNNYRSP113TW01 SFNNYRSP113TW01◊	Electric 208: 240: Gas: Electric 208: 240: Gas:	SDENYRGS153TW01 SDENYRGS173TW01 SDGNYRGS113TW01 SDEWYRGS153TW01◊◊ SDEWYRGS173TW01◊◊ SDGWYRGS113TW01◊◊	Electric 208: 240: Gas: Electric 208: 240: Gas:	SSENYAGS153TW01 SSENYAGS173TW01 SSGNYAGS113TW01 SSEWYAGS153TW01◊◊ SSEWYAGS173TW01◊◊ SSGWYAGS113TW01◊◊
	PREP COIN	SWNNX2SP113TW01 SWNNX2PP113TW02♦ SWNNX2SP113TW02♦	PREP COIN	SFNNXRSP113TW02♦	Electric 240: Gas:	SDENXRGS173TW01 SDGNXRGS113TW01 SDENXRGS173TW02♦ SDGNXRGS113TW02♦	Electric 240: Gas:	SSENXAGW173TW01 SSGNXAGW113TW01
Porcelain or Stainless Basket/Cylinder Volume - cu.ft. (liters)		3.26 (92.3)		3.42 (96.8)		7.0 (198)		7.0 (198) (ea)
Width - in (mm)		25 5/8 (651)		26 7/8 (683)		26 7/8 (683)		26 7/8 (683)
Depth - in (mm)		28 (711)		27 3/4 (704)		28 (711)		28 (711)
Height - in (mm) standard capacity high capacity♦		43 (1092) 43 7/8 (111.44)		43 (1092) 43 7/8 (1114)		43 (1092) 43 7/8 (1114)		78 3/16 (1986)
Weight - lb (kg)		190 (86)		253 (114.8)		Electric: 135 (61) Gas: 140 (64)		Electric: 265 (120) Gas: 275 (125)
Shipping Weight - lb (kg)		210 (95)		273 (123.8)		Electric: 145 (66) Gas: 150 (68)		Electric: 280 (127) Gas: 290 (132)
Cycle Time - minutes (default)		27		27/45		45		45
Motor HP (Capacitor Start and Thermal Protected)		0.9 HP 671 W		0.9 HP 671 W		1/3 HP, 5.5 amps		1/3 HP, 5.5 amps
Water Consumption - gal (Liter)		24.6 (93.0)		11.7 (44.3)		N/A		N/A
Water Factor - gal/ft³ (Liters/Liter/cycle)		7.9 (1.06)		3.8 (0.52)		N/A		N/A
Modified Energy Factor ft³/kWh/cycle (Liters/kWh/cycle)		1.69 (47.89)		2.98 (84.48)		N/A		N/A
Average Hot Water Per Cycle - gal (Liter)		1.9 (7.0)		0.4 (1.4)		N/A		N/A
Water Pressure PSI (Bar)		20-120 (1.4-8.3)		20-120 (1.4-8.3)		N/A		N/A
Spin Speed - RPM		710		500, 800, 1200		N/A		N/A
Cycle / Temperature		Light, Medium, Heavy, Small Load, Normal, Perm Press, Delicates Hot, Warm, Cold		Normal, Perm Press, Delicates/Bulky		High 160 ° Medium 155 ° Low 145 ° Delicate 115 ° No Heat		High 160 ° Medium 155 ° Low 145 ° Delicate 115 ° No Heat
Electrical Specifications and Circuit Requirements		120/60/1-15 amp		120/60/1-15 amp		Electric: 208/60/1-30 amp 240/60/1-30 amp* Gas: 120/60/1-15 amp		Electric: 2 ea 208/60/1-30 amp 240/60/1-30 amp* Gas: 2 ea 120/60/1-15 amp
Btu per Hour (kcal)		N/A		25,000 (6300)		25,000 (6300)		25,000 (6300)
Heating Element**		N/A		N/A		Electric: 2 ea 4750W (208) 5350W (240)		Electric: 2 ea 4750W (208) 5350W (240)
Type of Gas (Gas models only)		N/A		N/A		Factory-equipped natural/mixed gas convertible to LP gas**		Factory-equipped natural/mixed gas convertible to LP gas**
Utility Connections - in (mm)		N/A		N/A		Gas: 3/8 NPT (9.5)		Gas: 3/8 NPT (9.5)
Air Outlet Diameter - in (mm)		N/A		N/A		4 (102)		4 (102)
Exhaust Airflow - cfm (liters/sec)†		N/A		N/A		220 (105)		220 (105)
Maximum Exhaust Static Back Pressure		N/A		N/A		0.6" W.C.		0.6" W.C.
Agency Approval		cCSAus		cCSAus		Electric: cULus Gas: cCSAus		Electric: cULus Gas: cCSAus
Activation		Coin/Card Op		Coin/Card Op		Coin/Card Op		Coin/Card Op
Top and Lid Finish		Porcelain		Porcelain		Porcelain		N/A
Colors		White		White		White		White
Door Type		N/A		N/A		Solid		Solid, Window
Drain		Pump		Pump		--		--
Wireless Network Board Installed		--		--		Yes		Yes

**NOTE: Each stack dryer pocket requires its own separate power cord.**

\* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

\*\* IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

† Measured at point of exit from dryer.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the U.S.A.



**Speed Queen®**