

Speed Queen® Multi-Housing

Coin Slide Commercial Top Load Washer

Rear Control




BUILT FOR RELIABLE PERFORMANCE


- U.S. DOE compliance for energy and water efficiencies
- Durable stainless steel or porcelain enamel washtub
- Automatic balancing suspension system
- Dependable, Eversmooth transmission
- Curved four-vane polypropylene agitator
- 210° agitation stroke delivers superior washability

COIN SLIDE CONTROL

- Two washer control options
- Six wash cycles
- Three wash temperatures
- Easy to use controls offer basic features for optimal laundry room operation

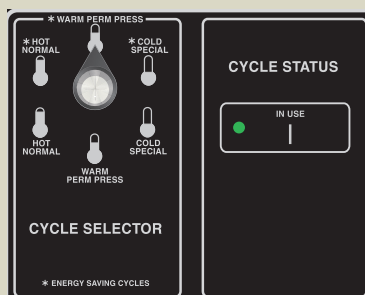


One-Speed

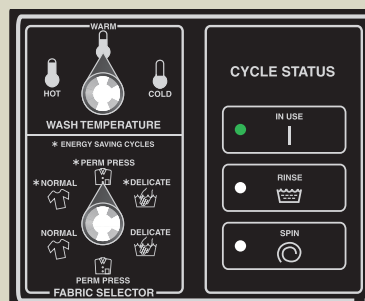

Two-Speed

COIN SLIDE **TOP LOAD WASHER** SPECIFICATIONS

<div>MODELS</div> <div>{NOTE: Coin Box Sold Separately}</div>						
		SWNSX1PP112TW01	SWNSX1SP112TW01	SWNSX2PP112TW01	SWNSX2SP112TW01	SWNSX2PP112TW02
Appearance						
Color		White	White	White	White	White
Porcelain Top and Lid Finish		Yes	Yes	Yes	Yes	Yes
Control Panel Selection		Rear	Rear	Rear	Rear	Rear
Activation		Coin Slide	Coin Slide	Coin Slide	Coin Slide	Coin Slide
Meter Case		Standard	Standard	Standard	Standard	High Capacity
Water and Energy Info						
Modified Energy Factor "MEF" ft³/kWh/cycle (Liters/kWh/cycle)		1.65 (46.7)	1.65 (46.7)	1.65 (46.7)	1.65 (46.7)	1.65 (46.7)
Water Factor "WF" gal/ft³ (Liters/Liter/cycle)		8.4 (1.12)	8.4 (1.12)	8.4 (1.12)	8.4 (1.12)	8.4 (1.12)
Water Consumption - gal (Liter)		27.3 (103.4)	27.3 (103.4)	27.3 (103.4)	27.3 (103.4)	27.3 (103.4)
Average Hot Water - gal (Liter)		2.3 (8.8)	2.3 (8.8)	2.3 (8.8)	2.3 (8.8)	2.3 (8.8)
Technical Info						
Basket Volume - cu. ft. (liters): 3.26 (92.3)		Porcelain	Stainless	Porcelain	Stainless	Porcelain
Net Weight - lb (kg)		190 (86)	190 (86)	190 (86)	190 (86)	190 (86)
Shipping Weight - lb (kg)		210 (95)	210 (95)	210 (95)	210 (95)	210 (95)
Electrical Requirements		120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp
Overall Dimensions WxDxH - in (mm): 25 5/8 (651) x 28 (711) x 43 (1092) <u>High Capacity</u> 25 5/8 (651) x 28 (711) x 43 7/8 (1114)						
Cabinet Height - in (mm)		36 (914)	36 (914)	36 (914)	36 (914)	36 (914)
Temperature - Hot, Warm, Cold		Yes	Yes	Yes	Yes	Yes
Cycle - Normal, Perm Press, Delicate		Yes	Yes	Yes	Yes	Yes
Motor		1/2 HP, 1 speed	1/2 HP, 1 speed	1/2 HP, 2 speed	1/2 HP, 2 speed	1/2 HP, 2 speed
Water Pressure PSI (Bar)		20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)
Spin Speed - RPM		710	710	high 710; low 474	high 710; low 474	high 710; low 474
Performance/Features						
Single-Belt Drive Simplicity		Yes	Yes	Yes	Yes	Yes
Pump Clips for Service Convenience		Yes	Yes	Yes	Yes	Yes
Agency Approval		cULus	cULus	cULus	cULus	cULus

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

