


Machine Dimensions and Specifications

Models STT30L, STT30N, STT45L and STT45N



Equipment specifications are subject to change without notice.

Dimensions

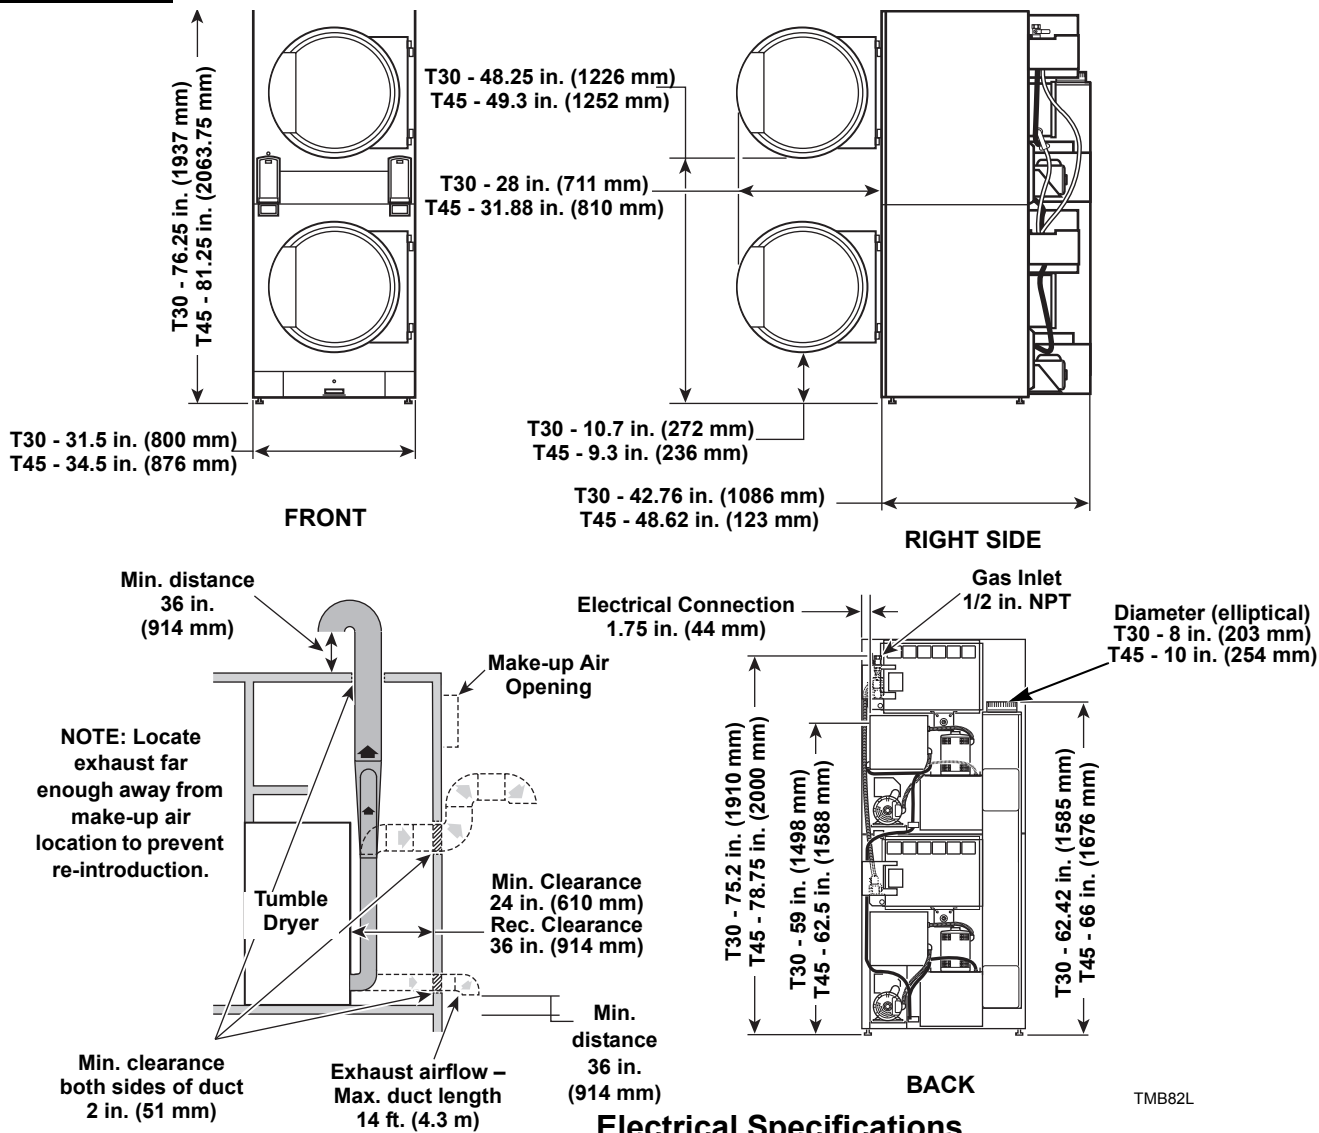

TMB82L

Electrical Specifications

Specifications

	T30	T45
Net Weight: Pounds	544	673
Make-up Air Opening: Square Inches	220	288
Maximum Airflow per Pocket: C.F.M.	400	600
Maximum Static Back Pressure: Inches W.C.	0.9	0.9
Gas Burner Rating: Btu/hr.	73,000	95,000
Recommended Gas Pressure: Inches W.C.	N.G.	6.5
	L.P.	11

Code	Voltage	Cycle	Phase	Wire	Full Load Amps	Fuse or Breaker Rating (Amps)	Breaker Poles	AWG
T30 A2	100	60	1	2/3	22.0	30	1	10
	200-220	60	1	2/3	11.6	15	1	14
T30 B2	120, 208-240	60	1	2/3	16	20	1	12
T30 F6	200-208, 240	60	3	3	6.4	10*	3	14
T30 G2	208-240	60	1	2/3	8	10	2	14
T30 M3	380	60	3	3	3.0	10*	3	14
T30 P1	440	60	3	3	3.3	10*	3	14
T30 Q1	460-480	60	3	3	3.3	10*	3	14
T45 F2	200	60	1	2/3	11.2	15	1	14
T45 F6	200-208, 240	60	3	3	9.6	15*	3	14
T45 G2	208-240	60	1	2/3	12	15	2	14

* 3 Phase machines should not have fuses, breakers only.