


**Speed Queen®**

**MULTI-HOUSING**

Micro-Display Rear Control  
Commercial Washers & Dryers

COIN  
CARD VEND

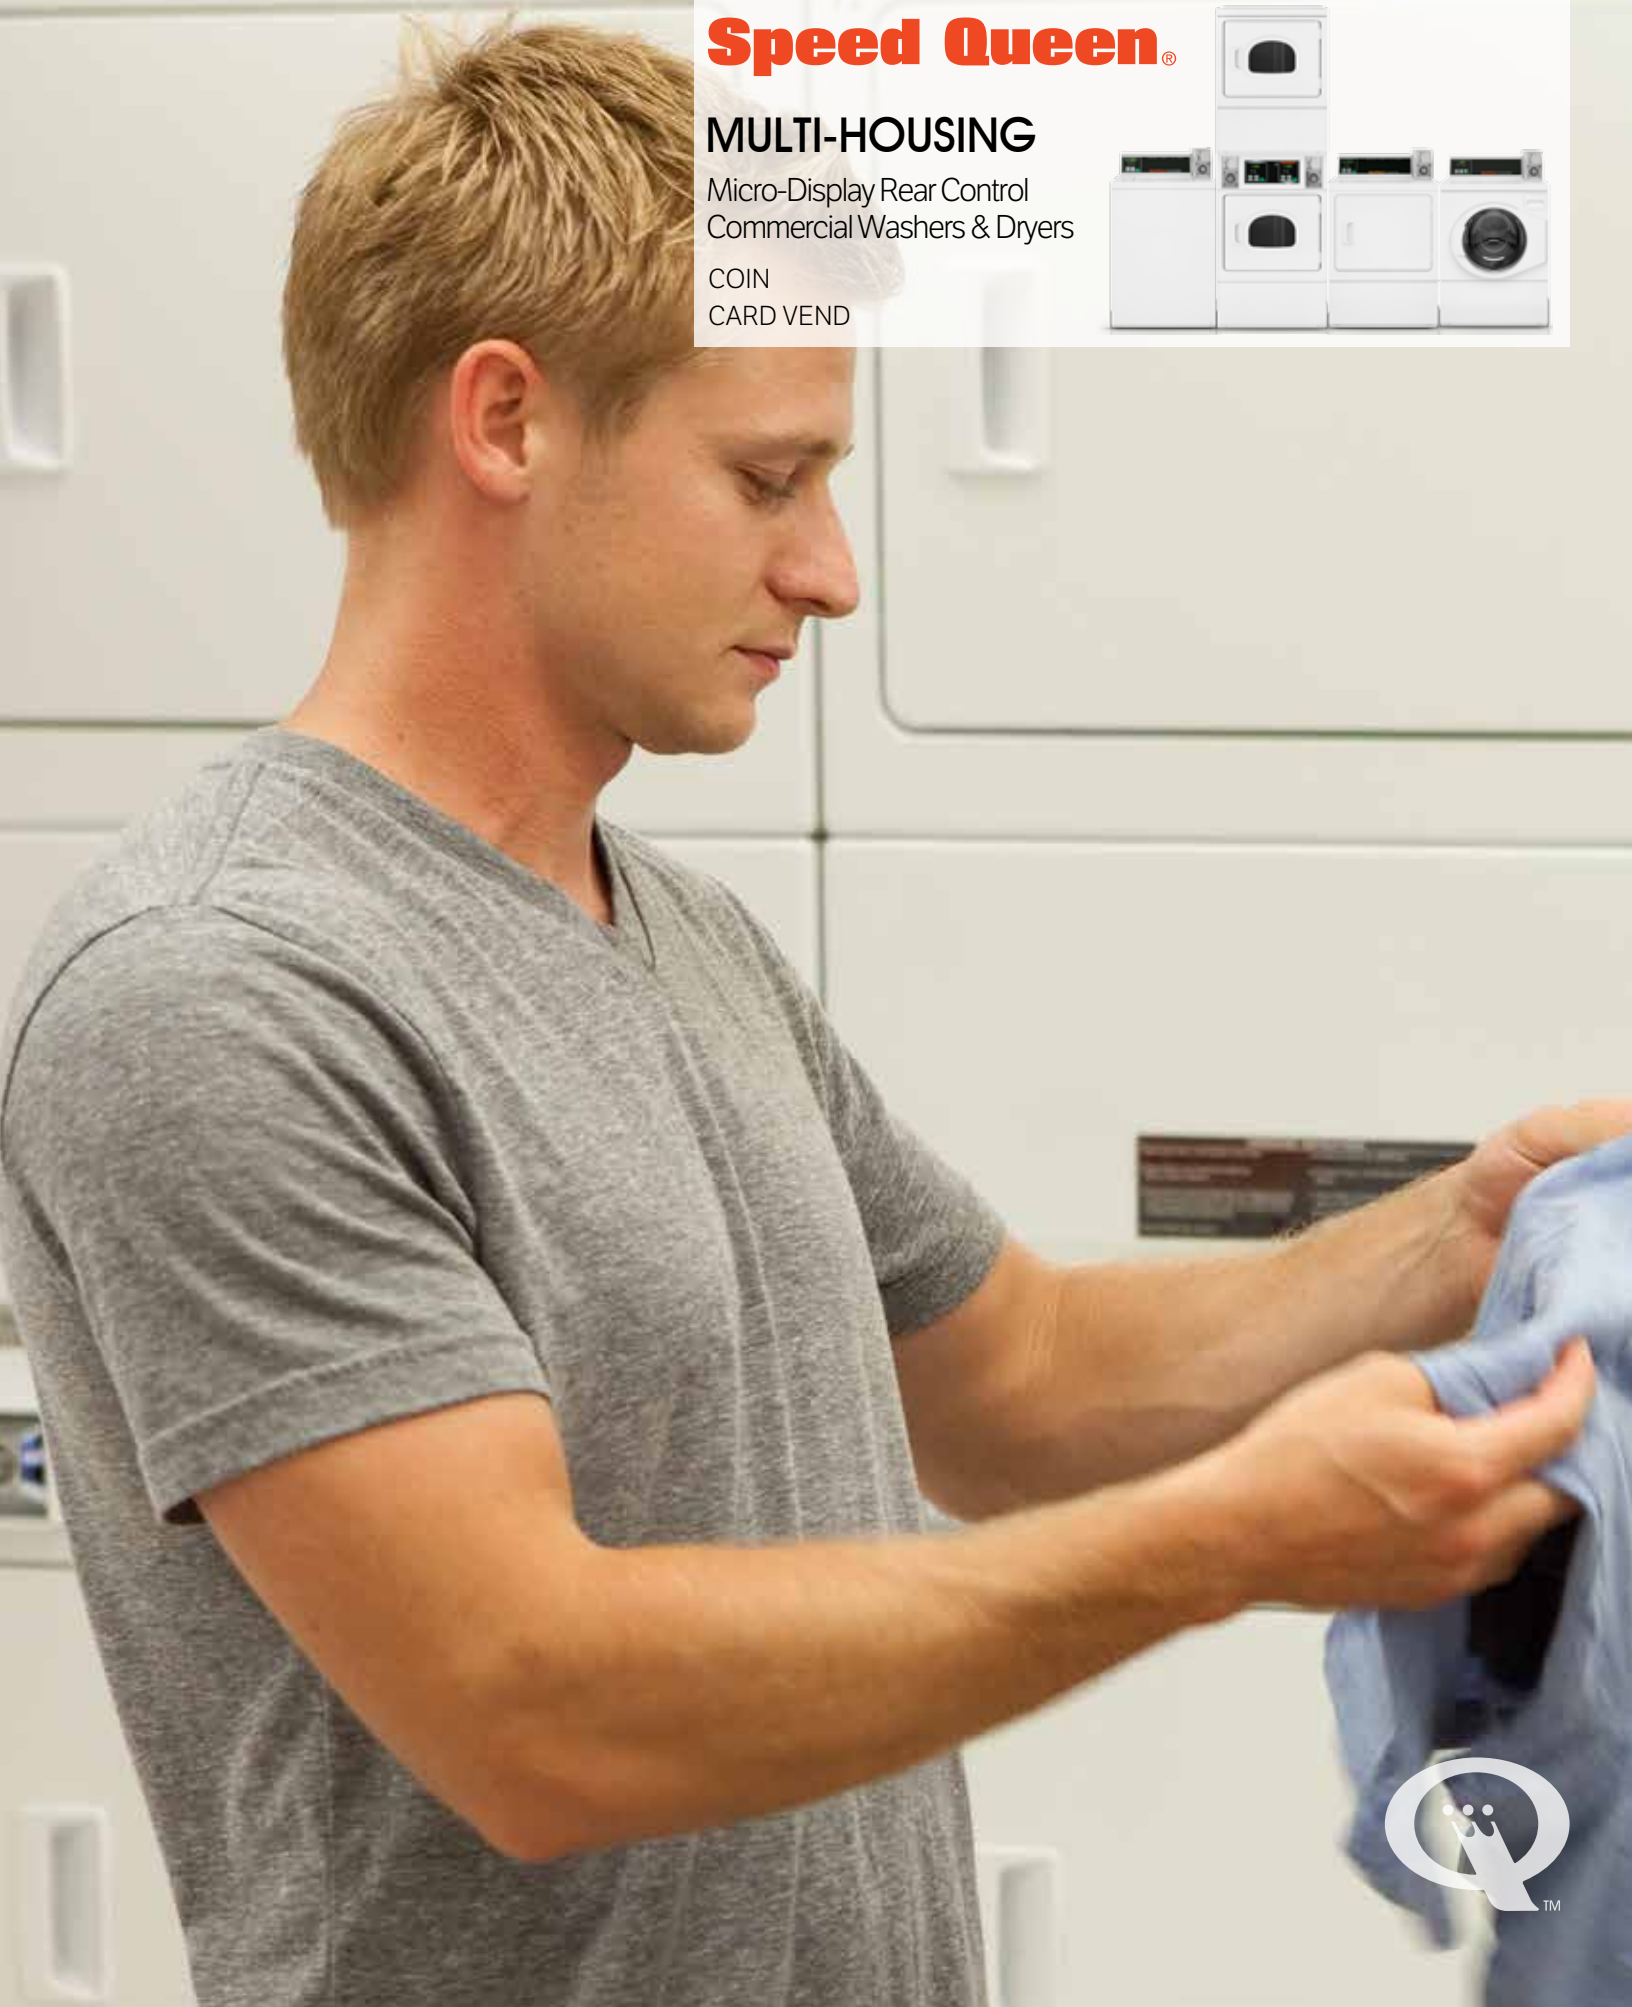

# BUILT FOR **RELIABLE** PERFORMANCE.

With some of the most advanced laundry equipment controls in the industry, Speed Queen provides the options and revolutionary technology for all your multi-housing laundry needs. The Micro-Display Control (MDC) offers simplified electronic controls with basic features that are most important to residents.

Micro Display Controls offer total automated management of your laundry room with simple, powerful programming allows you the ability to:

- Display vend price, coin and time countdown.
- Touch pad selection, combines temp and cycle.
- Manually program and audit.
- Front control models all come with high capacity meter case.

## **ACTIVATION** TYPES

Offering a variety of activation types allowing you to tailor your laundry room to fit your needs. Front control models all come with high capacity meter case.



**Coin ("C")**



**Prep for Card ("Y")**



**Prep for Coin ("X")**



## **TOP LOAD** WASHER

Speed Queen top load washers offer customer conveniences, quality components and a variety of different control/activation combinations allowing you to tailor your laundry room to fit your needs.



### FEATURES

#### HIGH SPEED EXTRACT

710 RPM final spin to maximize moisture removal from clothes.

#### AUTOMATIC BALANCING SUSPENSION SYSTEM

Rear self-leveling legs maximize smooth and quiet operation on all floor types.

#### DURABLE STAINLESS STEEL WASH TUB

Comes with a lifetime warranty, and actually becomes smoother with each use, so it won't pill, snag or fray clothes.

#### POLYTUFF® CURVED FOUR-VANE POLYPROPYLENE AGITATOR

High vanes and extra long 210° agitation stroke delivers superior washability for all load sizes.



# FRONT LOAD WASHER

The Speed Queen front load washer gives building owners and property managers unparalleled ability to reduce water and energy costs.

## FEATURES

### REVOLUTIONARY BALANCING TECHNOLOGY

Improved out-of-balance technology that uses a redesigned suspension and advanced sensing to manage and redistribute out-of-balanced loads, delivering uninterrupted cycles.



### LOW WATER USAGE

Per cycle to reduce operating costs.

### HIGH SPEED EXTRACT

1200 RPM final spin exerts 440 G-Force to maximize moisture removal from clothes.

### LARGER DOOR OPENING

Extra wide 15.5" (394 cm) for easy loading and unloading of clothes.

### STAINLESS STEEL WASH TUB

Comes with a lifetime warranty, and actually becomes smoother with each use, so it won't pill, snag or fray clothes.

### MULTI-COMPARTMENT SUPPLY DISPENSER

Automatically adds detergent, bleach and softener.



ENERGY STAR®  
Certified Washer

# SINGLE LOAD DRYER

Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Our cabinet design maintains the perfect balance of heat, airflow and tumble action for optimal performance and efficiency.



## FEATURES

### SUPERIOR DRYING CONVENIENCE

With a 2.06 sq. ft. (1914 cm<sup>2</sup>) door opening, making it the widest in the industry, Speed Queen dryers offer the convenience of easy loading and unloading.

### EFFICIENT DRYER HEATING

With 25,000 BTU (gas models) and up to 5,350 Watts (electric models), Speed Queen dryers offer some of the fastest drying times in the industry.

### UPFRONT LINT FILTER

Easy to clean and secured.



# STACK DRYER

The Speed Queen stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. Available with see-through or solid door models. (Solid door is reversible). Bottom dryer ADA Compliant.



# MICRO-DISPLAY CONTROL COMMERCIAL WASHER & DRYER SPECIFICATIONS

MODELS and ACTIVATION  {NOTE: Coin Box Sold Separately}	COIN	Top Load Washer	Front Load Washer	Single Load Dryer		Stack Dryer	
		SWNBC2PP112TW01 SWNBC2SP112TW01 SWNBC2PP112TW02*	SFNBRCSP113TW01 SFNBRCSP113TW02*	Electric 208: Electric 240: Gas: Electric 240: Gas:	SDET07WF1500 SDET07WF SDGT09WF SDEBCRGS171TW02* SDGBCRGS111TW02*	Electric 208: Electric 240: Gas: Electric 208: Electric 240: Gas:	SSEBCAGS151TW01 SSEBCAGS171TW01 SSGBCAGS111TW01 SSEBCAGW151TW01 SSEBCAGW171TW01 SSGBCAGW111TW01
	PREP CARD	SWNBY2PP112TW01 SWNBY2SP112TW01	SFNBYRSP113TW01	Electric 208: Electric 240: Gas:	SDEY07WF1500 SDEY07WF SDGY09WF	Electric 208: Electric 240: Gas: Electric 208: Gas:	SSEBYAGS151TW01 SSEBYAGS171TW01 SSBYAGW111TW01 SSEBYAGW171TW01 SSGBYAGW111TW01
	PREP COIN	SWNBX2SP112TW01 SWNBX2PP112TW02*	SFNBXRSP113TW01 SFNBXRSP113TW02*	Electric 208: Electric 240: Gas: Electric 240: Gas:	SDEX07WF1500 SDEX07WF SDGX09WF SDEBXRGS171TW02* SDGBXRGS111TW02*	Gas: Gas:	SSGBXAGW111TW01
Basket/Cylinder Volume - cu.ft. (liters)	3.26 (92.3) porcelain, stainless	3.42 (96.8) porcelain	7.0 (198)	7.0 (198)	7.0 (198) (ea pocket)		
Width - in (mm)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)		
Depth - in (mm)	27 3/4 (704)	27 3/4 (704)	28 (711)	28 (711)	28 (711)		
Height - in (mm): standard capacity high capacity*	43 (1092) 43 7/8 (1114)	43 (1092) 43 7/8 (1114)	43 (1092) 43 7/8 (1114)	43 (1092) 43 7/8 (1114)	78 3/16 (1986)		
Weight - lb (kg)	190 (86)	253 (114.8)	Electric: 135 (61) Gas: 140 (64)	Electric: 135 (61) Gas: 140 (64)	Electric: 265 (120) Gas: 275 (125)	265 (120) 275 (125)	
Shipping Weight - lb (kg)	210 (95)	273 (123.8)	Electric: 145 (66) Gas: 150 (68)	Electric: 145 (66) Gas: 150 (68)	Electric: 280 (127) Gas: 290 (132)	280 (127) 290 (132)	
Cycle Time - minutes (default)	27	27	45	45	45		
Motor - HP (kW)	0.9 (0.67)	0.9 (0.67)	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps		
Water Consumption - gal (Liter)	27.4 (103.6)	11.7 (44.3)	N/A	N/A	N/A		
Water Factor - gal/ft <sup>3</sup> (Liters/Liter/cycle)	8.4 (1.12)	3.8 (0.52)	N/A	N/A	N/A		
Modified Energy Factor - ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)	1.70 (48.14)	2.98 (84.48)	N/A	N/A	N/A		
Average Hot Water Usage - gal (Liter)	2.4 (9.0)	0.4 (1.4)	N/A	N/A	N/A		
Water Pressure PSI (Bar)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	N/A	N/A	N/A		
Spin Speed - RPM	high 710, low 474	500, 800, 1200	N/A	N/A	N/A		
Cycle/Temperature	Normal/Hot Normal/Warm Perm Press/Warm Delicate/Cold	Normal, Perm Press, Delicates Hot, Warm, Cold	High Medium Low Delicate	High Medium Low Delicate	High Medium Low Delicate		
Electrical Specifications and Circuit Requirements	120/60/1-15 amp	120/60/1-15 amp	Electric: 208/60/1-30 amp 240/60/1-30 amp* Gas: 120-60/1-15 amp	Electric: 208/60/1-30 amp 240/60/1-30 amp* Gas: 120-60/1-15 amp	Electric: 2 ea Gas: 2 ea	208/60/1-30 amp 240/60/1-30 amp* 120-60/1-15 amp	
Btu per Hour (kcal)	N/A	N/A	25,000 (6300)	25,000 (6300)	25,000 (6300)		
Heating Element	N/A	N/A	4750W, 208V 5350W, 240V	4750W, 208V 5350W, 240V	4750W, 208V 5350W, 240V		
Type of Gas (Gas models only)	N/A	N/A	Factory-equipped natural/mixed gas convertible to LP gas**	Factory-equipped natural/mixed gas convertible to LP gas**	Factory-equipped natural/ mixed gas convertible to LP gas**		
Utility Connections - in (mm)	N/A	N/A	Gas: 3/8" NPT (9.5)	Gas: 3/8" NPT (9.5)	Gas: 3/8" NPT (9.5)		
Air Outlet Diameter - in (mm)	N/A	N/A	4" (102)	4" (102)	4" (102)		
Exhaust Airflow - cfm (liters/sec)†	N/A	N/A	220 (105)	220 (105)	220 (105)		
Maximum Exhaust Static Back Pressure	N/A	N/A	0.6" W.C.	0.6" W.C.	0.6" W.C.		
Agency Approval	cULus	cULus	Electric: cULus Gas: cCSAus	Electric: cULus Gas: cCSAus	Electric: cULus Gas: cCSAus	cULus cCSAus	
Activation	Coin/Card Op	Coin/Card Op	Coin/Card Op	Coin/Card Op	Coin/Card Op		
Top and Lid Finish	Porcelain	Porcelain	Porcelain	Porcelain	N/A		
Colors	White	White	White	White	White		
Door Type	N/A	Window	Solid	Solid	Solid, Window		
Drain	Pump	Pump	N/A	N/A	N/A		

**NOTE: Each stack dryer pocket requires its own separate power cord.**

\* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

\*\* IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

† Measured at point of exit from dryer.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the U.S.A.



# Speed Queen®