


Machine Dimensions and Specifications

Models ST075L and ST075N



Equipment specifications are subject to change without notice.

Dimensions

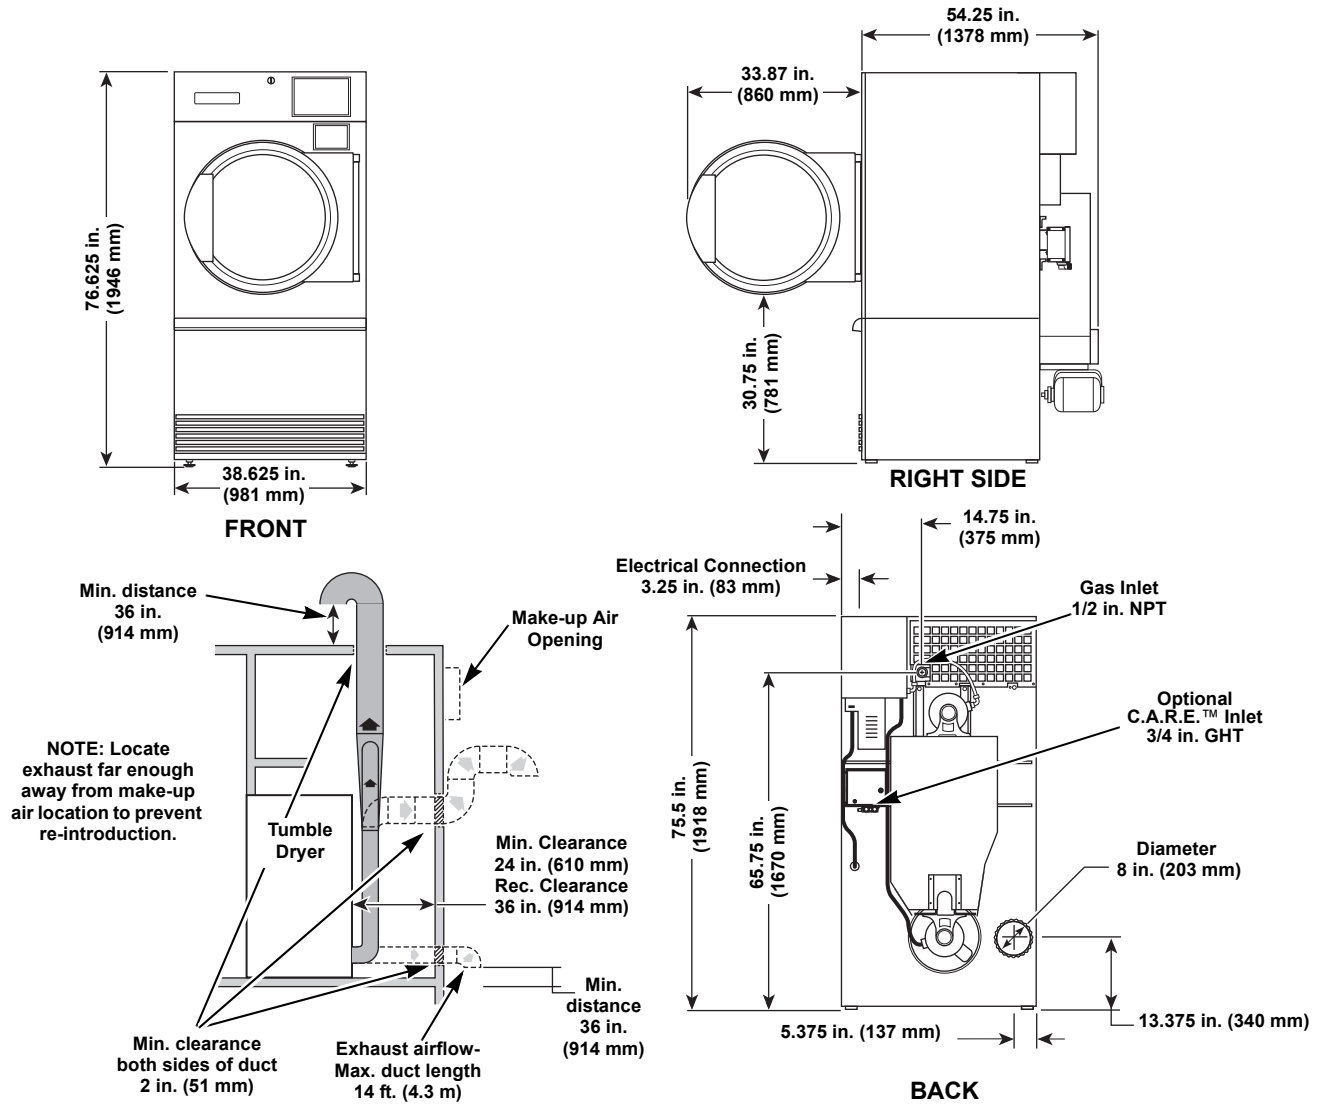

TMB74L

Specifications

| | | |
|---|----------------|-----|
| Net Weight | 615 lbs. | |
| Make-up Air Opening | 195 sq. in. | |
| Maximum Airflow per Pocket: C.F.M. | 920 | |
| Maximum Static Back Pressure: Inches W.C. | 0.5 | |
| Gas Burner Rating: | 165,000 Btu/hr | |
| Recommended Gas Pressure: Inches W.C. | N.G. | 6.5 |
| | L.P. | 11 |

Electrical Specifications

| Code | Voltage | Cycle | Phase | Wire | Full Load Amps | | Fuse or Breaker Rating (Amps) | Breaker Poles | AWG |
|------|-------------|-------|-------|------|----------------|-----------|-------------------------------|---------------|-----|
| | | | | | Nonreversing | Reversing | | | |
| B1 | 120 | 60 | 1 | 2 | 13.8 | N/A | 20 | 1 | 12 |
| B2 | 120/208-240 | 60 | 1 | 2 | 13 | 13 | 20 | 1 | 12 |
| F3 | 208-240 | 60 | 1 | 2 | 7.6 | N/A | 20 | 1 | 12 |
| F6 | 200-208/240 | 60 | 3 | 3 | 3.8 | 4.3 | 10* | 3 | 14 |
| M3 | 380 | 60 | 3 | 3 | 1.8 | 2.1 | 10* | 3 | 14 |
| P1 | 440 | 60 | 3 | 3 | 1.9 | 2.1 | 10* | 3 | 14 |
| Q1 | 460-480 | 60 | 3 | 3 | 1.9 | 2.1 | 10* | 3 | 14 |

* 3 Phase machines should not have fuses, breakers only.